

Extech 400 Series MultiMeter + IR Thermometer

Rugged multimeters with built-in non-contact InfraRed Thermometer and True RMS functions

Features:

- Models 450 and 470 include built-in non-contact IR thermometer with laser!
- Low current capability – measure down to 0.1µA
- Audible and visual input alerts
- Easy to read 1 inch digits on backlit display
- MAX (Model 450) and RELATIVE (Models 430 and 470) functions
- IR thermometer has 8:1 distance to target ratio, 0.95 fixed emissivity
- Complete with CAT III test leads, multi-position tilt stand and velcro strip for hanging, protective holster with test lead holder, bead wire temperature probe (except Model 450) and 9V battery

Advantages of Non-Contact InfraRed Temperature with laser

Troubleshoot

Quickly locate hot spots

Distance

8:1 distance to target ratio allows for measurements in areas that are normally difficult or unsafe to reach

Speed

Point and shoot with final result in seconds

Convenience


No cables or probes to connect, break or lose.



InfraRed Thermometer with built-in laser!
(Patent Pending)



Extech
400 Series

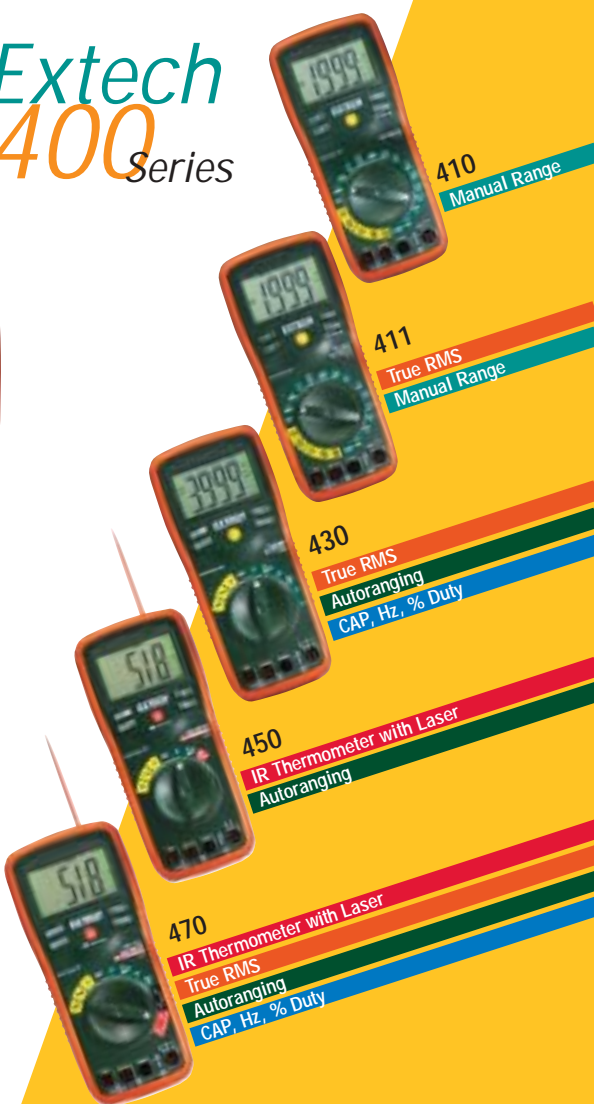

Model No.	410	411	430	450	470
Description	Manual Ranging DMM	True RMS DMM	True RMS Autoranging DMM	DMM + IR Thermometer	True RMS + IR Thermometer
Display	2000 Counts Backlit	2000 Counts Backlit	4000 Counts Backlit	2000 Counts Backlit	4000 Counts Backlit
Basic Accuracy	±0.5% (VDC)	±0.5% (VDC)	±0.3% (VDC)	±0.5% (VDC)	±0.3% (VDC)
DC Voltage	0.1mV to 600V (4 ranges)	0.1mV to 600V (4 ranges)	0.1mV to 600V	0.1mV to 600V	0.1mV to 600V
AC Voltage	1mV to 600V (3 ranges)	0.1mV to 600V	0.1mV to 600V	0.1mV to 600V	0.1mV to 600V
DC Current	0.1µA to 20A (3 ranges)	0.1µA to 20A	0.1µA to 20A	0.1µA to 20A	0.1µA to 20A
AC Current	0.1mA to 20A (2 ranges)	0.1µA to 20A	0.1µA to 20A	0.1µA to 20A	0.1µA to 20A
Resistance	0.1Ω to 20MΩ (5 ranges)	0.1Ω to 20MΩ	0.1Ω to 40MΩ	0.1Ω to 20MΩ	0.1Ω to 40MΩ
Capacitance	—	0.01nF to 100µF	—	—	0.01nF to 100µF
Frequency	—	0.001Hz to 10MHz	—	—	0.001Hz to 10MHz
Temperature (Type K)	-4 to 1382°F (-20 to 750°C)	—	-4 to 1382°F (-20 to 750°C)	—	-4 to 1382°F (-20 to 750°C)
Temperature (IR with laser)	—	—	—	-4 to 518°F (-20 to 270°C)	-4 to 518°F (-20 to 270°C)
Diode/Continuity	Yes	Yes	Yes	Yes	Yes
CAT Rating	CAT III-600V	CAT III-600V	CAT III-600V	CAT III-600V	CAT III-600V
Warranty	One Year	Three Year	Three Year	Three Year	Three Year
PRICE	\$39	\$59	\$79	\$99	\$129